



## Key Features

- Touch function for wet hands and multiple types of glove
- Pen clicks & Palm rejection technology
- 4-sides frameless design and optional stand for flexibility
- Friendly touch mode setting
- Intuitive touch OSD with ViewSonic Touch Controller

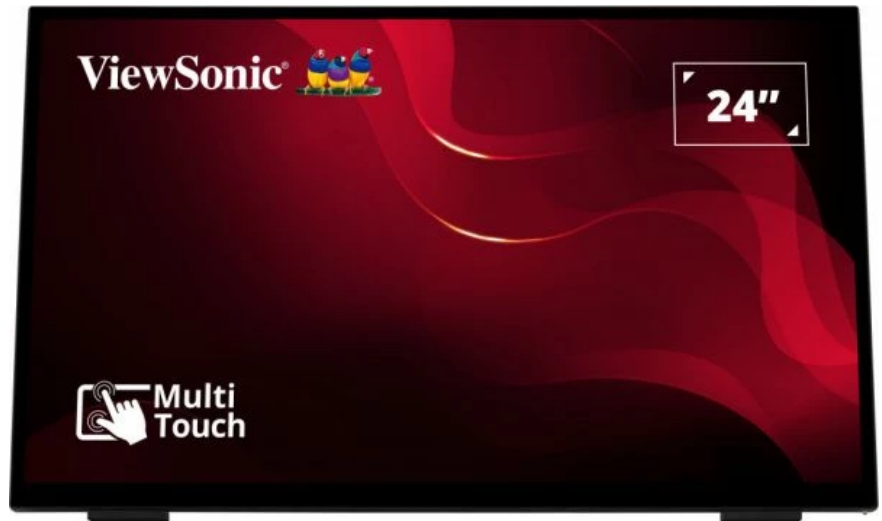

## Product Description

The ViewSonic's TD2465 is the ideal solution for commercial and industrial spaces. Designed for wet hands touch, glove touch, and for any conductive stylus' tip touch including pencil. The TD2465 delivers an intuitive 10-point PCAP touch technology for maximum interactivity. Featuring ViewSonic Touch Controller software, allowing you to control the device intuitively. Connection options include HDMI and DisplayPort inputs for effortless sharing capabilities. Equipped with VESA mounting design for any surface and Kiosk, the touch screen is the perfect display for various.

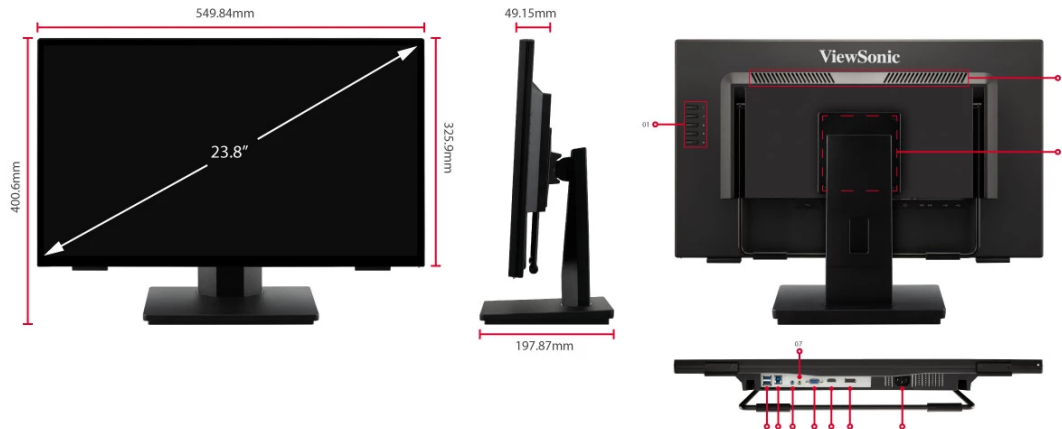

- |   |             |
|---|-------------|
| 1. Menu Control                             | 7. Audio in |
| 2. Speakers                                 | 8. VGA      |
| 3. VESA Compatible(Wall Mount 100 x 100 mm) | 9. HDMI     |
| 4. USB-A *2 (Downstream)                    | 10. DP in   |
| 5. USB-B (Upstream)                         | 11. AC in   |
| 6. Earphone                                 |             |

Visit Us

[www.viewsonic.com](http://www.viewsonic.com)



## DISPLAY

Display Size (in.):	24
Viewable Area (in.):	23.8
Panel Type:	VA Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	3,000:1 (typ)
Dynamic Contrast Ratio:	20M:1
Light Source:	LED
Brightness:	250 cd/m <sup>2</sup> (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + Hi-FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	7ms
Response Time (GTG w/OD):	6.969ms
Response Time (Typical Tr+Tf):	16ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 102% size (Typ)
Pixel Size:	0.275 mm (H) x 0.275 mm (V)
Touch Screen:	Projected Capacitive, 10-point multi-touch
Surface Treatment:	Glossy, Hard Coating (7H)
Cover Glass Thickness:	1.2mm
<b>COMPATIBILITY</b>	
PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080
<b>CONNECTOR</b>	
VGA:	1
USB 3.2 Type A Down Stream:	2
USB 3.2 Type B Up Stream:	1
3.5mm Audio In:	1
3.5mm Audio Out:	1
HDMI 1.4:	1
DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)
<b>AUDIO</b>	
Internal Speakers:	2Watts x2
<b>POWER</b>	
Eco Mode (Conserve):	20W
Eco Mode (optimized):	22W
Consumption (typical):	24W
Consumption (max):	26W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	Internal Power Supply

## ADDITIONAL HARDWARE

Kensington Lock Slot:	1
Cable Organization:	Yes
<b>CONTROLS</b>	
Physical Controls:	1, 2, Up, Down, Power
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall
<b>OPERATING CONDITIONS</b>	
Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%
<b>WALL MOUNT</b>	
VESA Compatible:	100 x 100 mm
<b>INPUT SIGNAL</b>	
Frequency Horizontal:	24 ~ 82KHz
Frequency Vertical:	50 ~ 75Hz
<b>VIDEO INPUT</b>	
Digital Sync:	TMD5 - HDMI (v1.4), PCI-E - DisplayPort (v1.2)
Analog Sync:	Separate/Composite/SOG - RGB Analog
<b>ERGONOMICS</b>	
Tilt (Forward/Back):	-5° / 20°
<b>WEIGHT (IMPERIAL)</b>	
Net (lbs):	12.5
Net Without Stand (lbs):	10.4
Gross (lbs):	15.8
<b>WEIGHT (METRIC)</b>	
Net (kg):	5.7
Net Without Stand (kg):	4.7
Gross (kg):	7.2
<b>DIMENSIONS (IMPERIAL) (WXHXD)</b>	
Packaging (in.):	25.5 x 16.8 x 5.4
Physical (in.):	21.6 x 15.8 x 7.8
Physical Without Stand (in.):	21.6 x 12.8 x 1.9
<b>DIMENSIONS (METRIC) (WXHXD)</b>	
Packaging (mm):	647 x 426 x 138
Physical (mm):	550 x 401 x 198
Physical Without Stand (mm):	550 x 326 x 49
<b>GENERAL</b>	
Regulations:	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NOM, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, RCM
PACKAGE CONTENTS:	TD2465 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, USB A/B Cable (v3.2; Male-Male) x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market
Power Management:	Energy Star standards, EPEAT