



TD-9461S4-C

6MP Dual Illumination Water-proof Bullet Network Camera

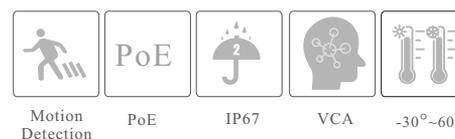

- H.265+ /H.265 /H.264+ /H.264/MJPEG coding
- Max. resolution: 6MP (3200 × 1800)
- Auto day/night switch
- 3D DNR, HWDR, HLC, BLC, etc.
- ROI coding
- Support smart supplement light
- 20~30m white light view distance; 20~30m IR view distance
- DC12V/PoE power supply
- IP 67 ingress protection
- Support three streams
- Support remote monitoring by smart phones& tablet PCs with iOS and Android OS
- Support NAT function
- Support SMD
- Support line crossing detection, region intrusion detection, abandoned/missing object detection, video exception detection
- Dual-system backup

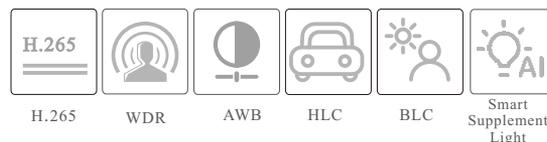

en.tvt.net.cn

For more information, please visit our website

SPECIFICATIONS


Specifications	Model	TD-9461S4-C
Camera		
Image Sensor		1 / 2.5 "CMOS
Image Size		3200×1800
Electronic Shutter		1 / 4s ~ 1 / 100000s
Iris Type		Fixed Iris
Min. Illumination		0.008 lux @F1.6, AGC ON; 0 lux with illumination on
Lens		2.8mm@F1.6, Horizontal FoV: 104°; Vertical FoV: 55°; Diagonal FoV: 128° 3.6mm@F1.6, Horizontal FoV: 78°; Vertical FoV: 38°; Diagonal FoV: 94°
Focus		Fixed
Lens Mount		M12
Day&Night		ICR
Wide Dynamic Range		120dB
BLC		Yes
HLC		Yes
Digital NR		Yes
S/N Ratio		≥50dB
Angle Adjustment		Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°
Image		
Video Compression		Main stream: H.265+ / H.265 / H.264+ / H.264 Sub / Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.265 Compression Standard		Main Profile@Leve4.1 High Tier
Resolution		6MP (3200×1800), 4MP(2688×1520), 2K(2560×1440), 1080P(1920×1080), 720P(1280×720), D1, VGA (640×480), 480×240, CIF
Main Stream		6MP(1~20fps) / 4MP/2K/1080P (60Hz: 1~30fps; 50Hz: 1~25fps)
Sub Stream		1080P (60Hz: 1~15fps; 50Hz: 1~12fps) / 720P/D1/VGA/480×240/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
Third Stream		D1/480×240/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
Bit Rate		64 Kbps ~8Mbps
Bit Rate Type		VBR / CBR
Image Settings		ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
Audio Compression		G711A/U
ROI		Each ROI to be configured separately
Interfaces		
Network		RJ45 (10/100 Base-T)
Video Output		No
Audio		1CH audio input; 1CH built-in MIC
Storage		Built-in micro SD card slot, up to 256GB
Reset		Yes
Functions		
Remote Monitoring		Web browser /NVR/NVMS/Mobile APP
Web Browser		Chrome 105.0+/Edge 105.0+/Firefox 121.0+/Safari 14.0+
Online Connection		Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
Network Protocol		UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPS, HTTP POST, NAT, QoS
Interface Protocol		ONVIF
API&SDK		Yes
Storage		Network remote storage; micro SD card storage
Smart Alarm		Motion detection, SMD, SD card error, SD card full, IP address conflict, network disconnection, video exception
Smart Event		Line crossing/region intrusion (human/vehicle classification), abandoned/missing object detection
General Function		Watermark, IP address filtering, video mask, heartbeat, ANR, cloud upgrade, smart supplement light, corridor pattern, disarming
PoE		Yes (IEEE802.3af)
Supplement Light Range		IR range: 20 ~ 30 m; white light range: 20 ~ 30 m
Ingress Protection		IP67
Security		Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP/API

*When HWDR function is enabled, the main/sub/third stream supports up to 20fps (except for the 1080P sub stream).

DORI Distance

Lens	Detect	Observe	Recognize	Identify
2.8mm	69m(226ft)	28m(92ft)	14m(46ft)	7m(23ft)
3.6mm	105m(344ft)	42m(138ft)	21m(69ft)	10m(33ft)
Others				
Power Supply	DC12V/PoE			
Power Consumption	DC12V: <5W; PoE: ≤6.5W			
Storage Conditions	-30 °C ~ 65 °C (-22 °F ~ 149 °F), Humidity: less than 95 % (non-condensing)			
Operating Conditions	-30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity: less than 95 % (non-condensing)			
Dimensions (mm)	167.4 × 75.1 × 74.7			
Weight (net)	Approx. 0.45KG			
Material	Aluminum alloy body			
Installation	Ceiling mounting; wall mounting			
Certificate	CE, FCC			
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)			

DIMENSIONS

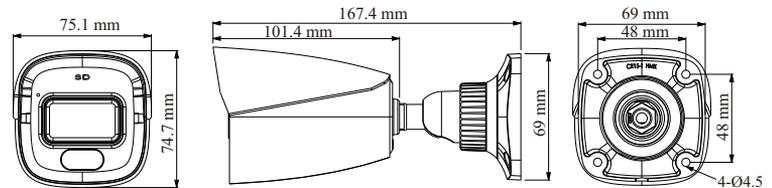

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9461S4-C(D/PE/AW2)
-----------------	-----------------------