




Key Features

- 4,500 ANSI Lumens, offering clear images in any environment
- Up to 300" ultra large screen with lower cost-per-inch
- Easy and flexible connection: dual HDMI ports, USB Type-A port
- Vivid colors with ViewSonic's SuperColor™ Technology
- Convenient software updates for projectors via USB connection



Product Description

The PA700W is ViewSonic's high brightness WXGA business/education projector. With 4,500 ANSI Lumens of highbrightness, the projector offers clear images of up-to-300" large screen in meeting rooms, classrooms, or anyother bright environment. The dual HDMI ports allow you to flexibly connect to multiple devices, easily switchingbetween content sources. The USB Type-A port can supply power to HDMI wireless dongles, making wireless contentstreaming more convenient. The projector also allows software updates via USB cable connection with simply yourlaptops, skipping trips to service centers.

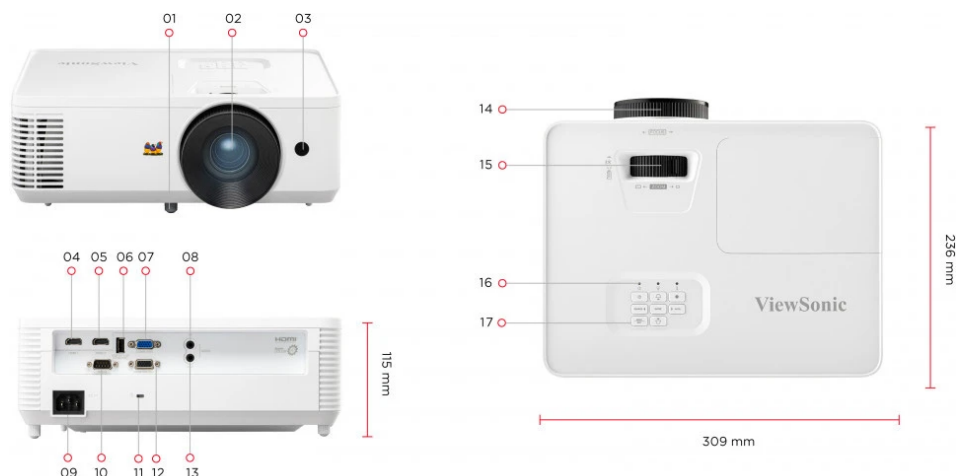

1. Adjustment Foot
2. Lens
3. Front IR
4. HDMI 1
5. HDMI 2
6. USB-A(SV/1.5A, Service)
7. Computer In

8. Audio In
9. AC In
10. R232
11. Kensington Lock
12. Monitor Out
13. Audio Out

15. Zoom Ring
16. LED Indicator
17. Keypad

Visit Us www.viewsonic.com



SPECIFICATION

| | |
|---|--|
| Native Resolution: | 1280x800 |
| Brightness: | 4500 (ANSI Lumens) |
| Contrast Ratio with SuperEco Mode: | 12500:1 |
| Display Color: | 1.07 Billion Colors |
| Light Source Type: | 240W UHP Lamp |
| Light Source Life (hours) with Normal Mode: | 4000 |
| Light Source Life (hours) with SuperEco Mode: | 12000 |
| Lens: | F=2.41-2.53, f=21.85-24mm |
| Projection Offset: | 112.4%+/-5% |
| Throw Ratio: | 1.544-1.72 |
| Optical Zoom: | 1.1x |
| Digital Zoom: | 0.8x-2.0x |
| Image Size: | 30"-300" |
| Throw Distance: | 1.00m-11.11m (100"@3.33m) |
| Keystone: | +/- 40° (V) |
| Audible Noise (Normal): | 34dB |
| Audible Noise (Eco): | 25dB |
| Input Lag: | 33.2ms |
| Resolution Support: | VGA(640 x 480) to FullHD(1920 x 1080) |
| HDTV Compatibility: | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p |
| Video Compatibility: | NTSC, PAL, SECAM |
| Horizontal Frequency: | 15K-102KHz |
| Vertical Scan Rate: | 23-120Hz |

INPUT

| | |
|-------------------------------------|---------------------------|
| Computer in (share with component): | 1 |
| HDMI: | 2 (HDMI 1.4/ HDCP 1.4) |
| Audio-in (3.5mm): | 1 |

OUTPUT

| | |
|---------------------|-------------|
| Monitor out: | 1 |
| Audio-out (3.5mm): | 1 |
| Speaker: | 3W |
| USB Type A (Power): | 1 (5V/1.5A) |

CONTROL

| | |
|------------------------|--------------------------------|
| RS232 (DB 9-pin male): | 1 |
| USB Type A (Services): | 1 (share with USB A Output) |

OTHERS

| | |
|--|--|
| Power Supply Voltage: | 100-240V+/- 10%, 50/60Hz (AC in) |
| Power Consumption: | Normal: 295W Standby: <0.5W |
| Operating Temperature: | 0~40°C |
| Carton: | Brown |
| Net Weight: | 2.70kg |
| Gross Weight: | 3.80Kg |
| Dimensions (WxDxH) with Adjustment Foot: | 309x234x115mm |
| Packing Dimensions: | 400x337x168mm |
| OSD Language: | English, German, French, Swedish, Spanish, Portuguese, Polish, Dutch, T. Chinese, S.Chinese, Finnish, Korean, Russian, Hungarian, Czech, Arabic, Thai, Turkish, Vietnamese, Indonesian, Greek, Italian, Total 22 languages |
| User Guide Language: | English, S-Chinese, T-Chinese, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Total 15 languages |

STANDARD ACCESSORY

| | |
|-----------------|---------------|
| Power Cord: | 1 |
| VGA Cable: | 1 |
| Remote Control: | 1 |
| QSG: | Yes |
| Air Filter: | Yes (CN Only) |
| Warranty Card: | Yes (CN Only) |

OPTIONAL ACCESSORY

| | |
|---------------------|-------------|
| Lamp/Light Source: | RLC-128 |
| Air Filter: | RSPL |
| Wall/Ceiling Mount: | PJ-WMK-007 |
| Carry Bag: | PJ-CASE-008 |